

# Components of a Microprocessor

# Components of a Microprocessor

- Memory:
  - Storage of data
  - Storage of a program
  - Either can be temporary or “permanent” storage
- Registers: small, fast memories
  - General purpose: store arbitrary data
  - Special purpose: used to control the processor

# Components of a Microprocessor

- Instruction decoder:
  - Translates current program instruction into a set of control signals
- Arithmetic logical unit:
  - Performs both arithmetic and logical operations on data: add, subtract, multiply, AND, OR ...
- Input/output control modules

# Components of a Microprocessor

- Many of these components must exchange data with one-another
- It is common to use a 'bus' for this exchange

# Collections of Bits

- 8 bits: a “byte”
- 4 bits: a “nybble”
  
- “words”: can be 8, 16, or 32 bits  
(depending on the processor)

# Collections of Bits


- A data bus typically captures a set of bits simultaneously
- Need one wire for each of these bits
- In the Atmel Mega2560: the data bus is 8-bits “wide”
- In your home machines: 32 or 64 bits

# Memory

What are the essential components of a memory?

# A Memory Abstraction

- We think of memory as an array of elements – each with its own address
- Each element contains a value
  - It is most common for the values to be 8-bits wide (so a byte)

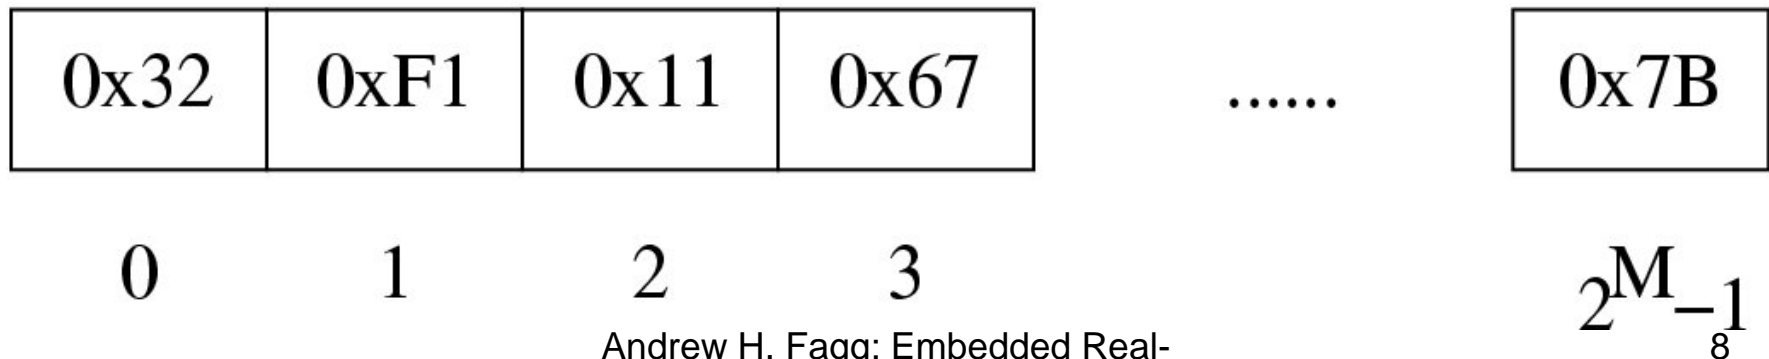




# A Memory Abstraction

- We think of memory as an array of elements – each with its own address
- Each element contains a value
  - It is most common for the values to be 8-bits wide (so a byte)

Stored value

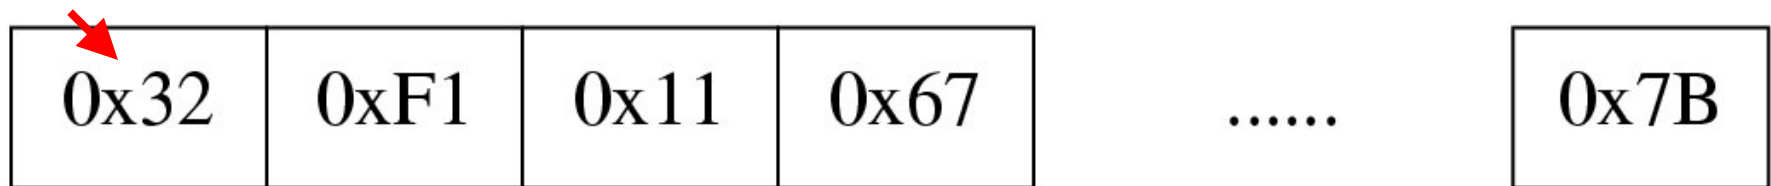

0

1

2

3

$2^M - 1$   
9

Address

# Memory Operations

## Read

```
foo ( A+5 ) ;
```

reads the value from the memory location referenced by the variable 'A' and adds the value to 5. The result is passed to a function called `foo ( ) ;`

# Memory Operations

Write

```
A = 5 ;
```

writes the value 5 into the memory location referenced by 'A'

# Types of Memory

## Random Access Memory (RAM)

- Computer can change state of this memory at any time
- Once power is lost, we lose the contents of the memory
- This will be our data storage on our microcontrollers

# Types of Memory

## Read Only Memory (ROM)

- Computer **cannot** arbitrarily change state of this memory
- When power is lost, the contents are maintained

# Types of Memory

## Erasable/Programmable ROM (EPROM)

- State can be changed under very specific conditions (usually not when connected to a computer)
- Our microcontrollers have an Electrically Erasable/Programmable ROM (EEPROM) for program storage

# CPU Exercise...

- Note: The concepts in the next ~50 slides below are covered in our acting exercise




# Buses

- In the simplest form, a bus is a single wire
- Many different components can be attached to the bus
- Any component can take input from the bus or place information on the bus

# Buses

- At most one component may write to the bus at any one time
- In a microprocessor, which component is allowed to write is usually determined by the code that is currently executing


# Atmel Mega2560 Architecture

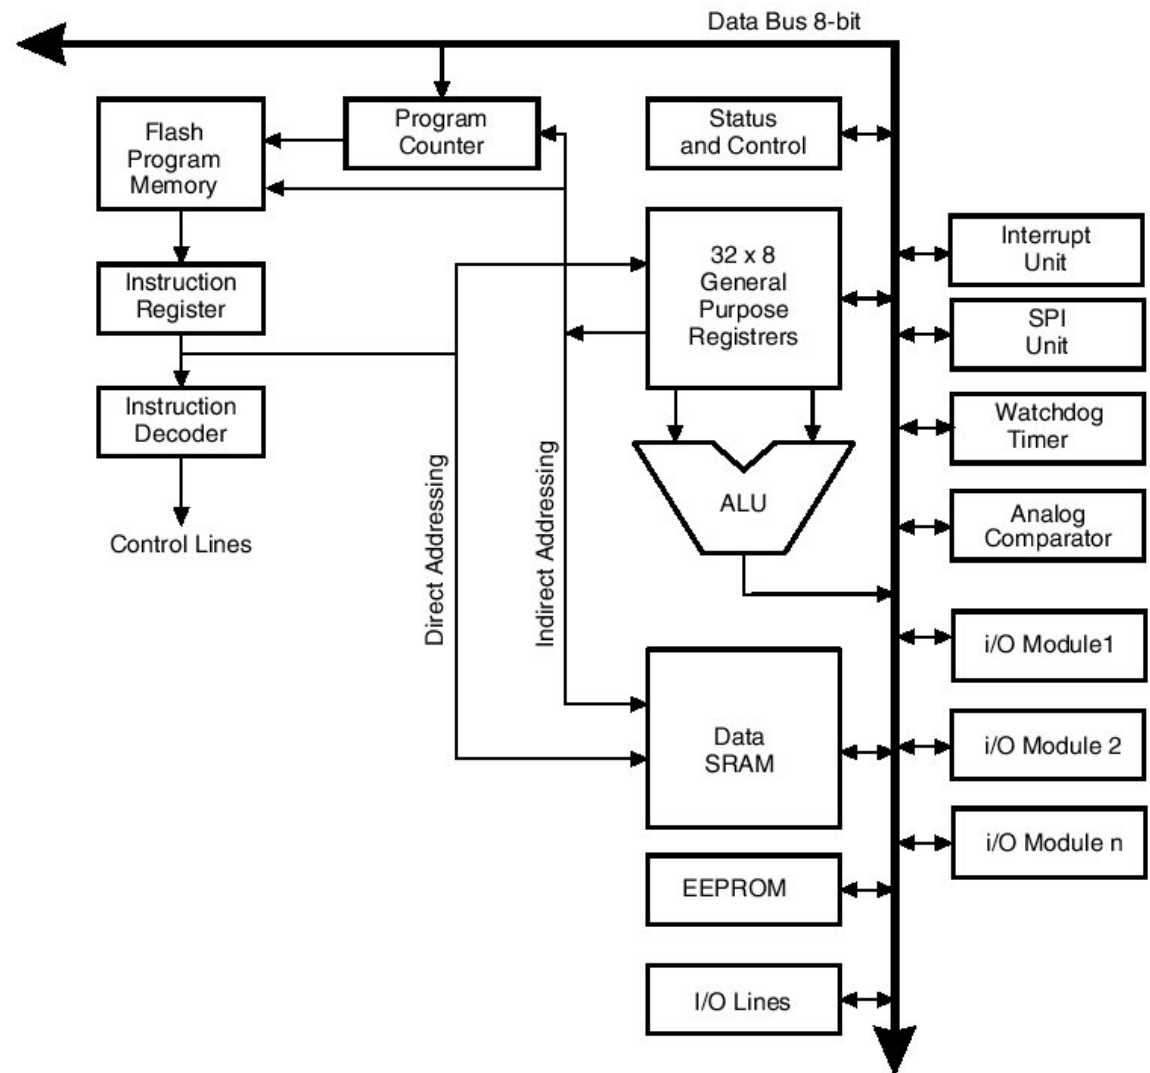

# Atmel Mega2560

8-bit data bus


- Primary mechanism for data exchange

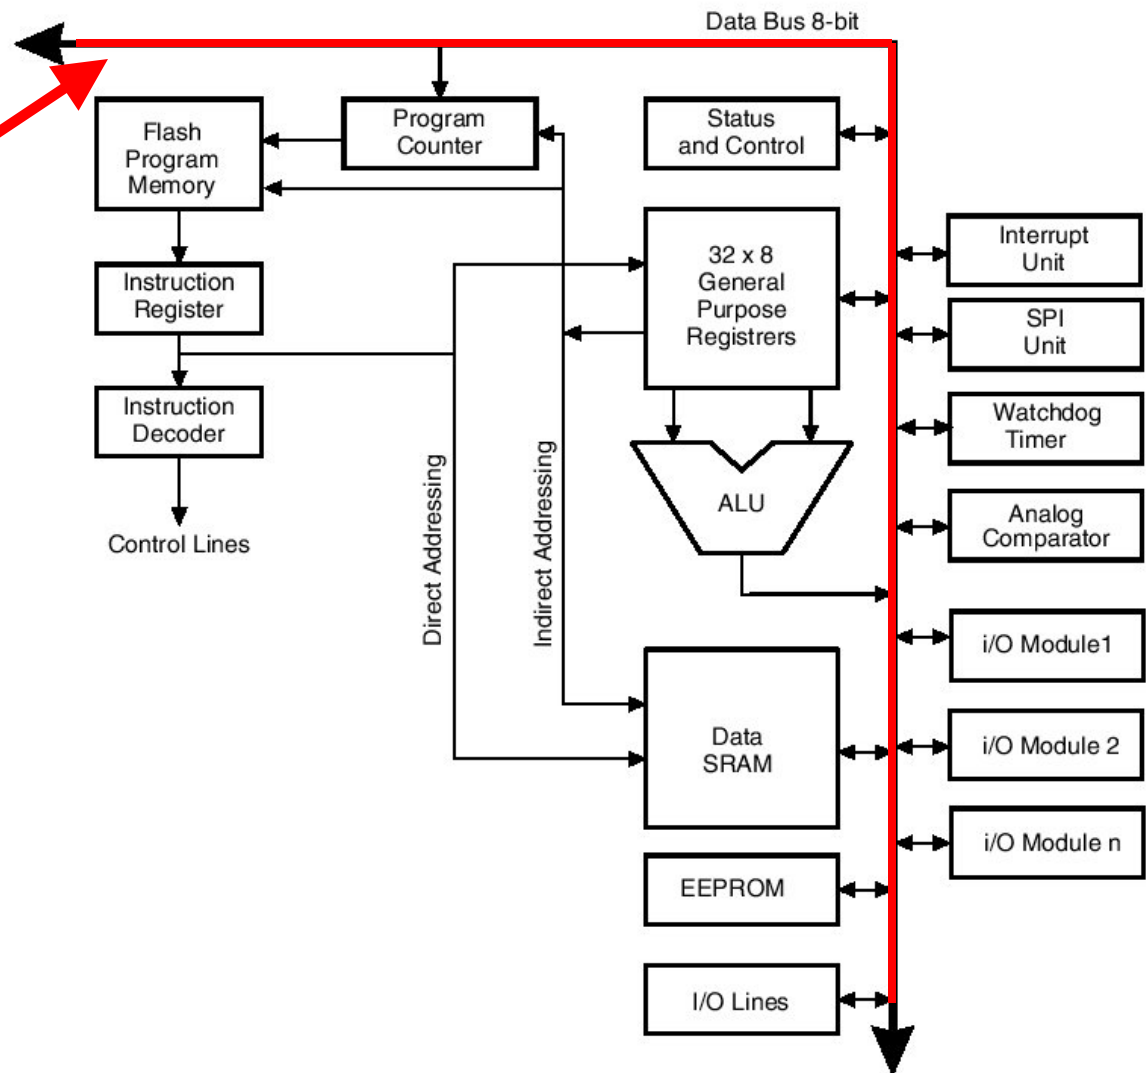

# Atmel Mega2560

32 general purpose registers


- 8 bits wide
- 3 pairs of registers can be combined to give us 16 bit registers

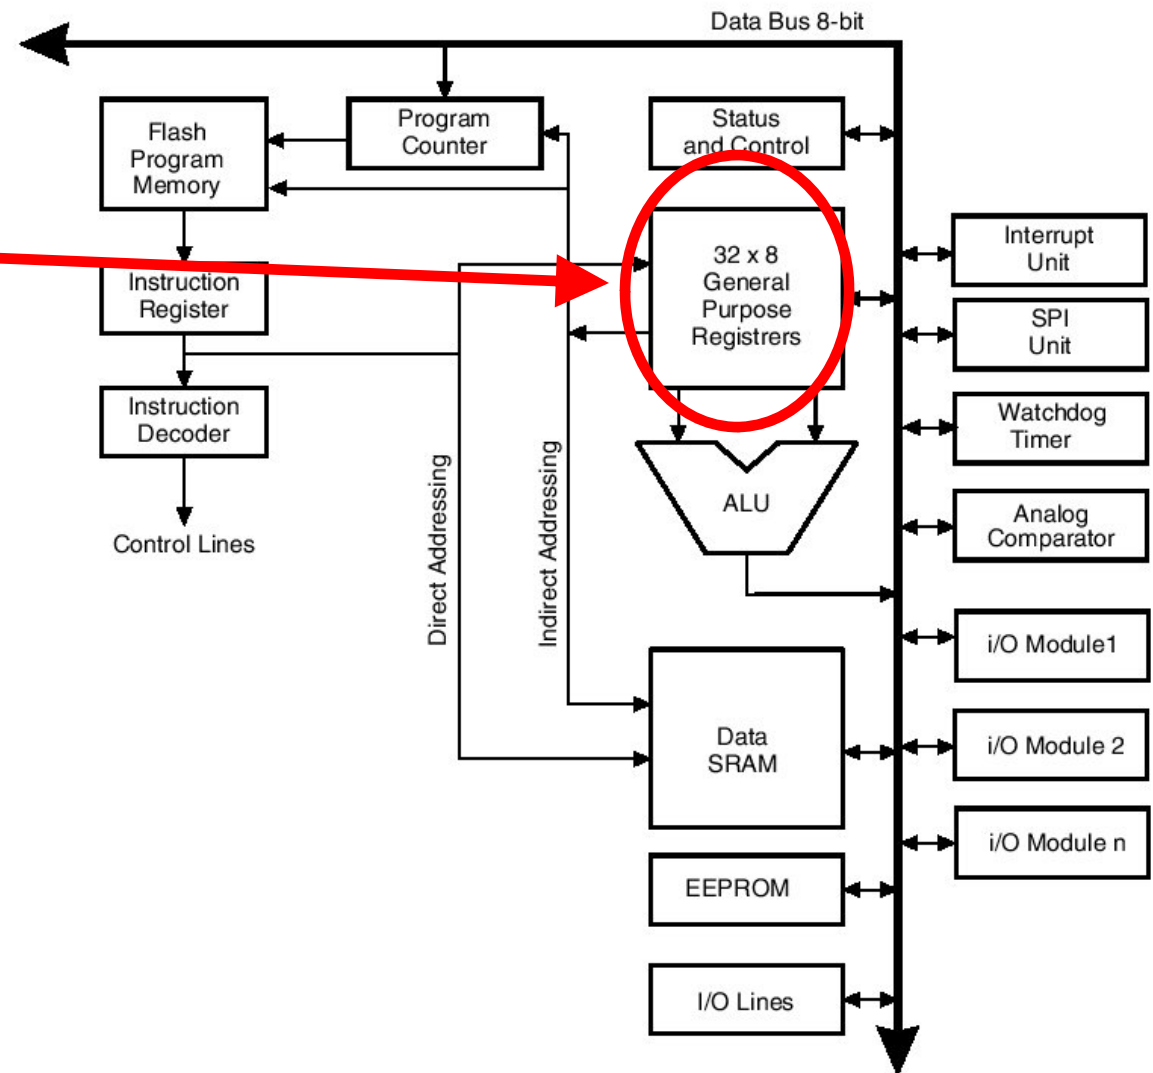

# Atmel Mega2560


Special purpose registers

- Control of the internals of the processor

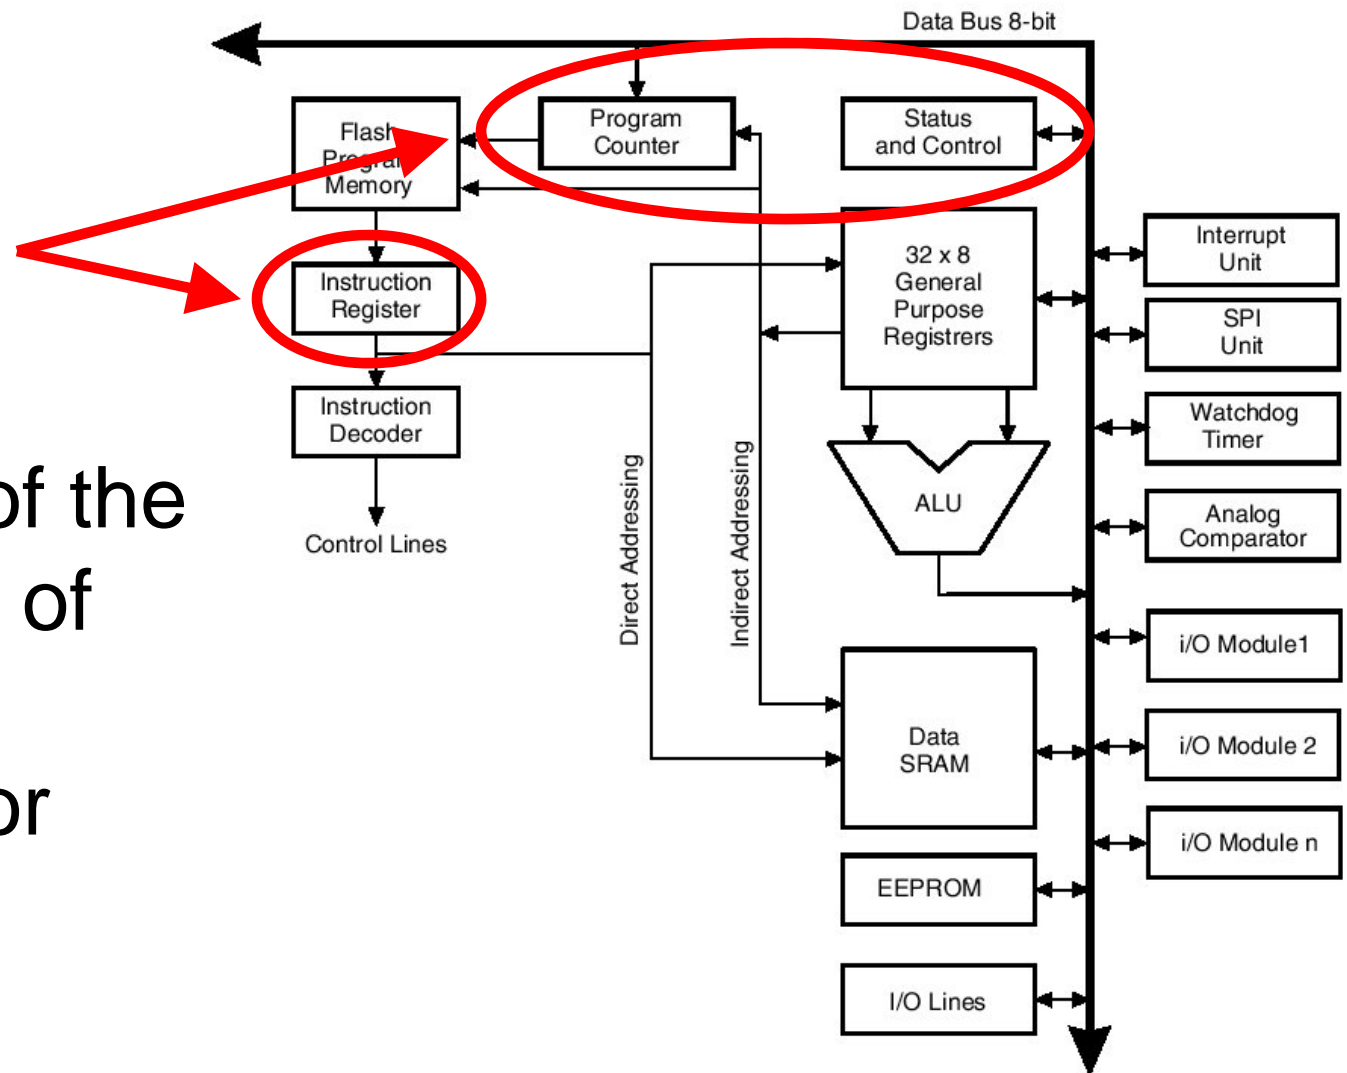

# Atmel Mega2560

- Random Access Memory (RAM)
- 8 KByte in size

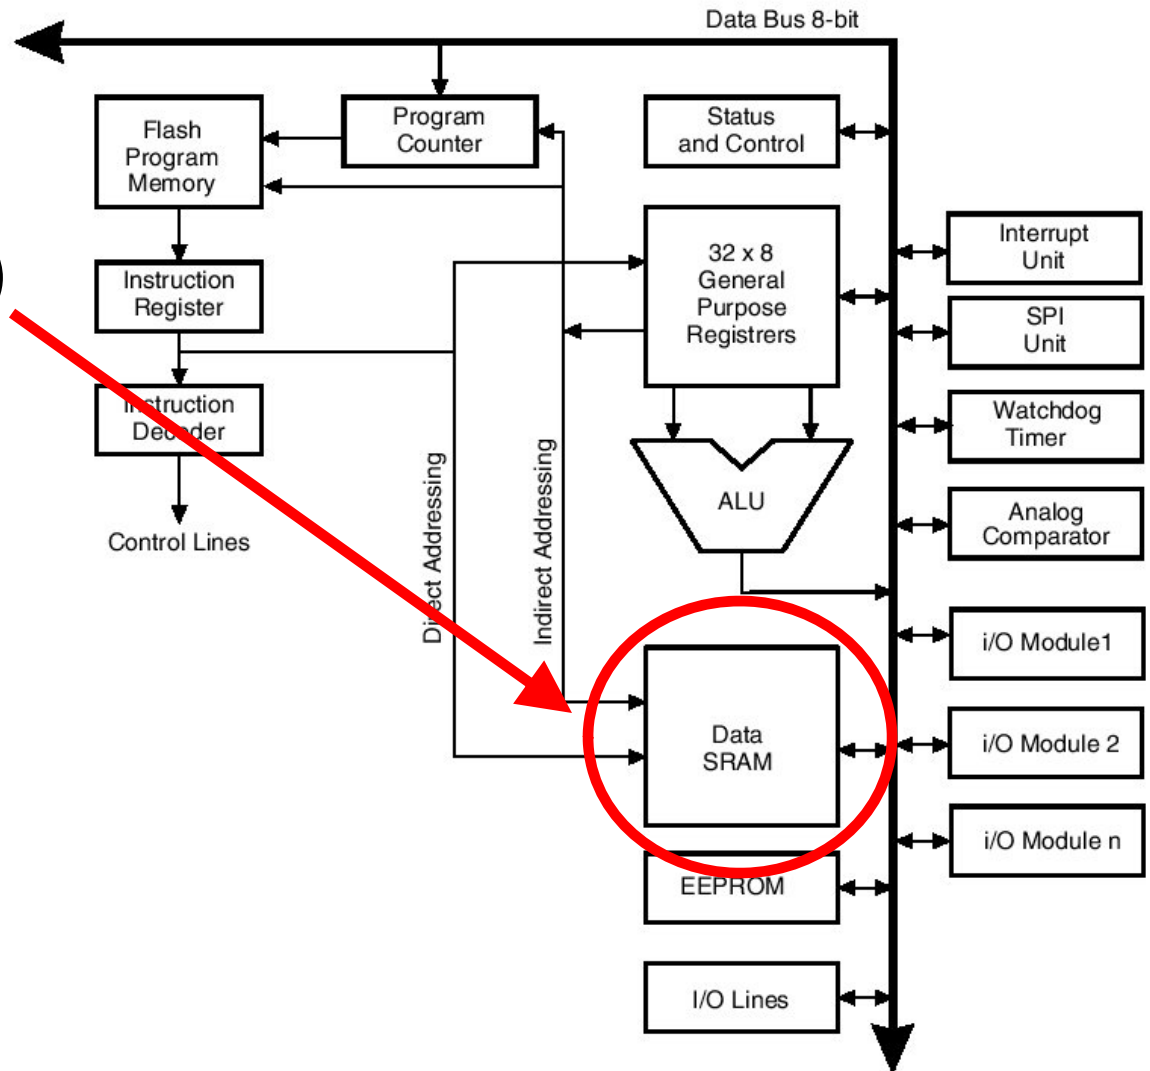


# Atmel Mega2560

Random Access Memory (RAM)

- 8 KByte in size

Note: in high-end processors, RAM is a separate component

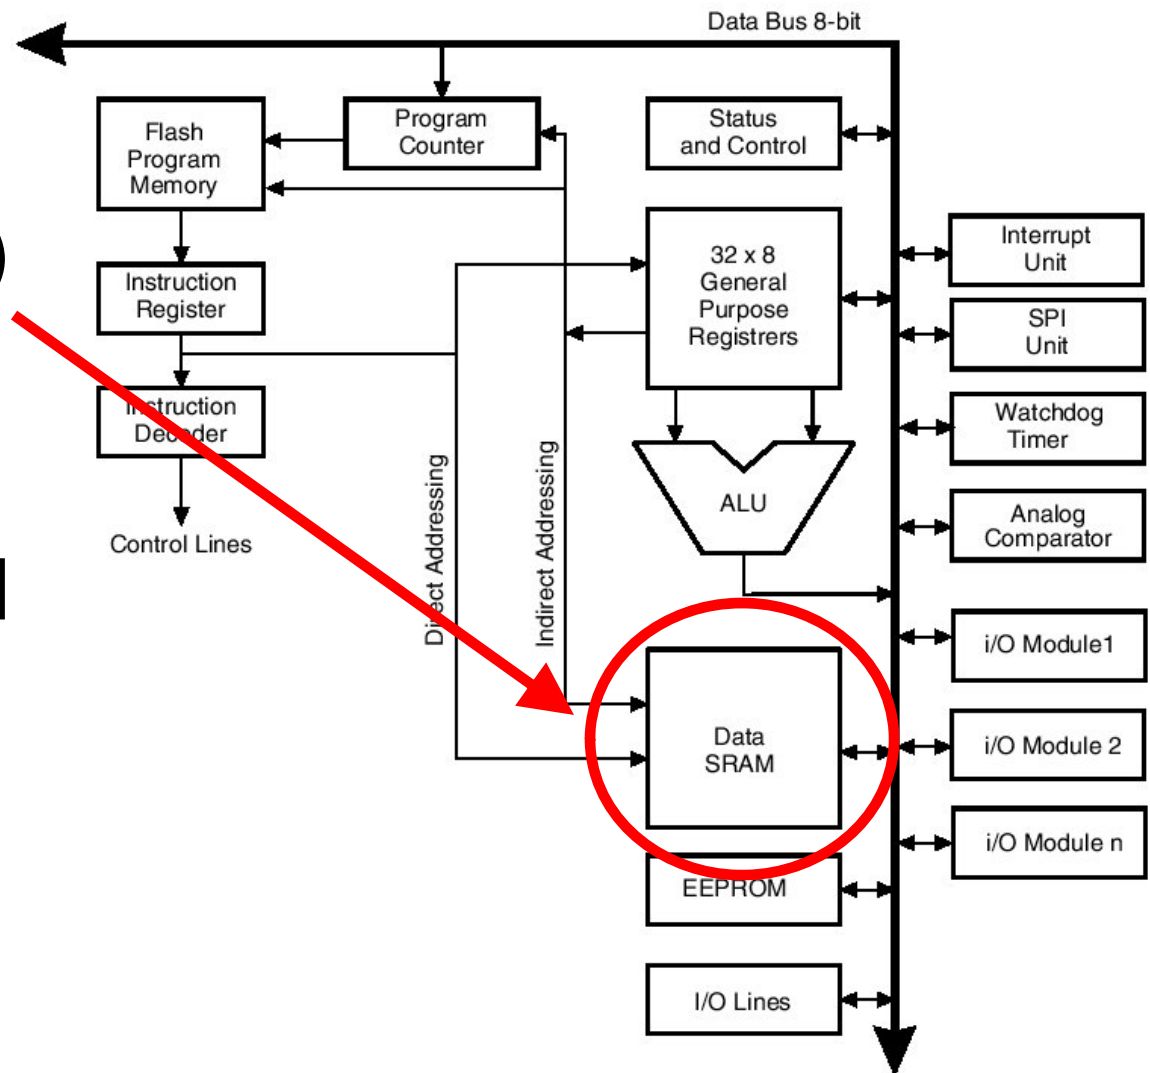




# Atmel Mega2560

## Flash (EEPROM)


- Program storage
- 256 KByte in size

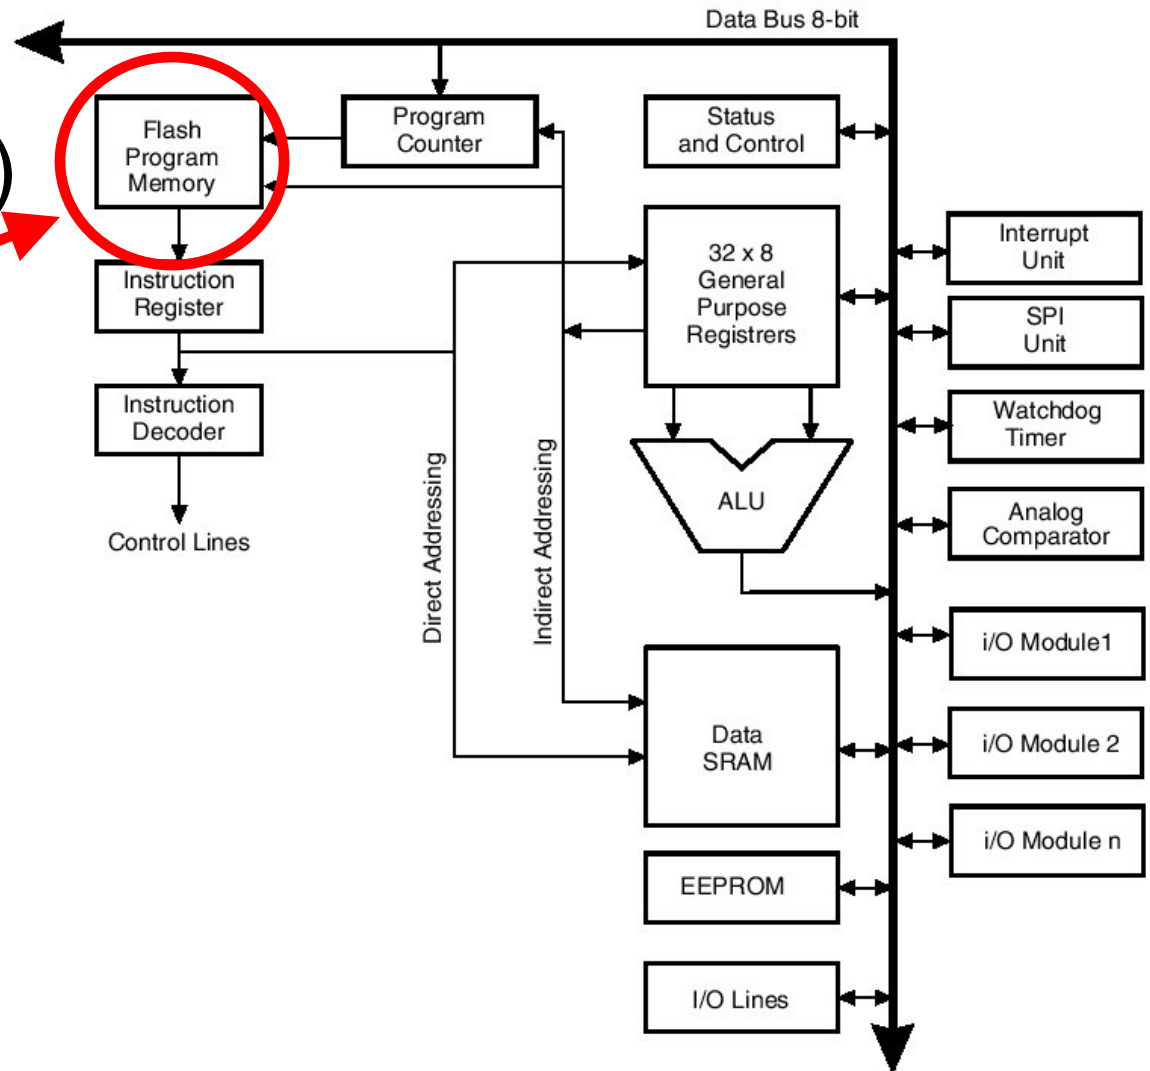

# Atmel Mega2560

## Flash (EEPROM)


- In this and many microcontrollers, program and data storage is separate
- Not the case in our general purpose computers

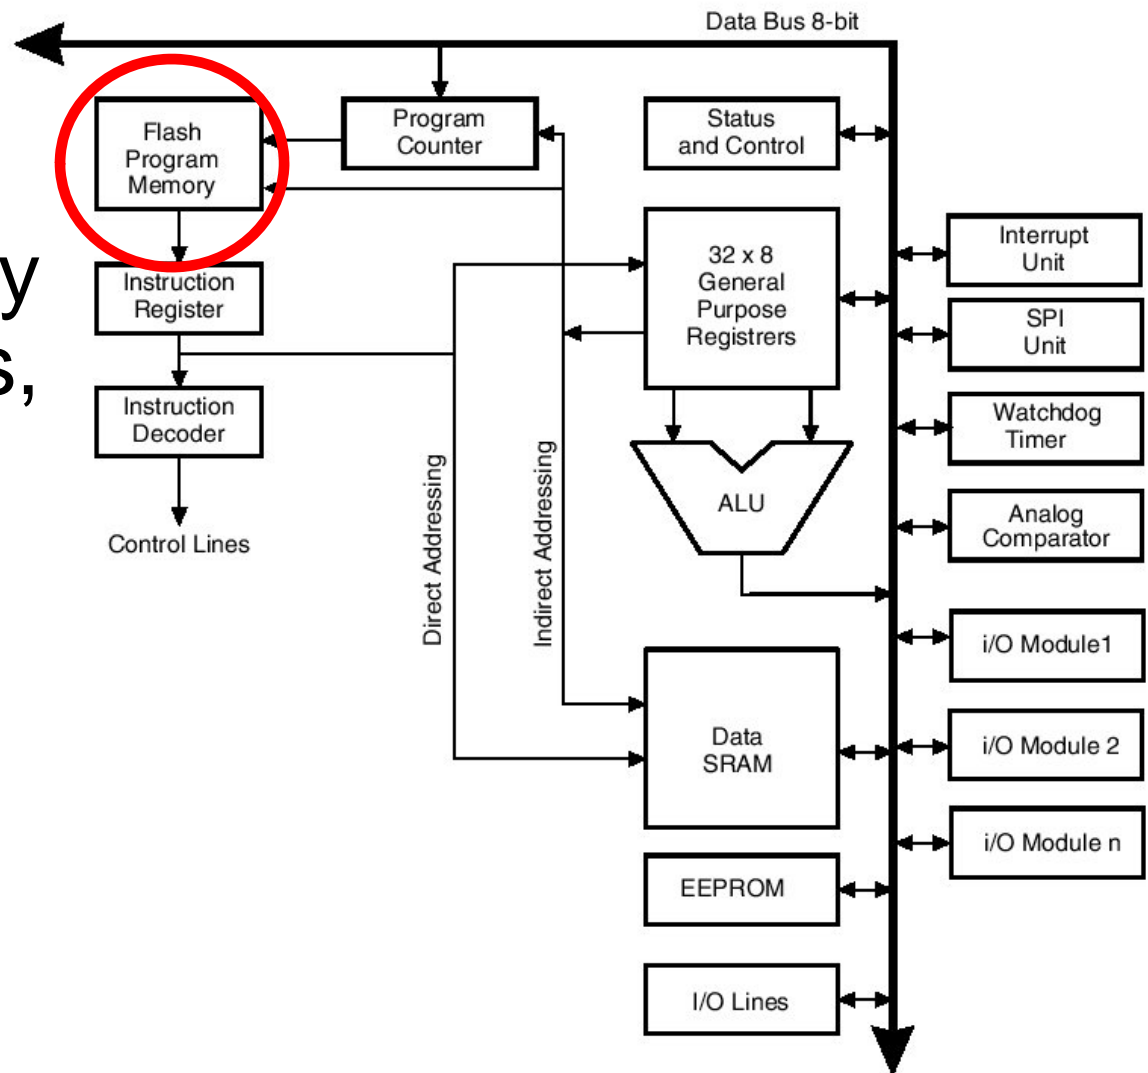

# Atmel Mega2560

## EEPROM

- Permanent data storage

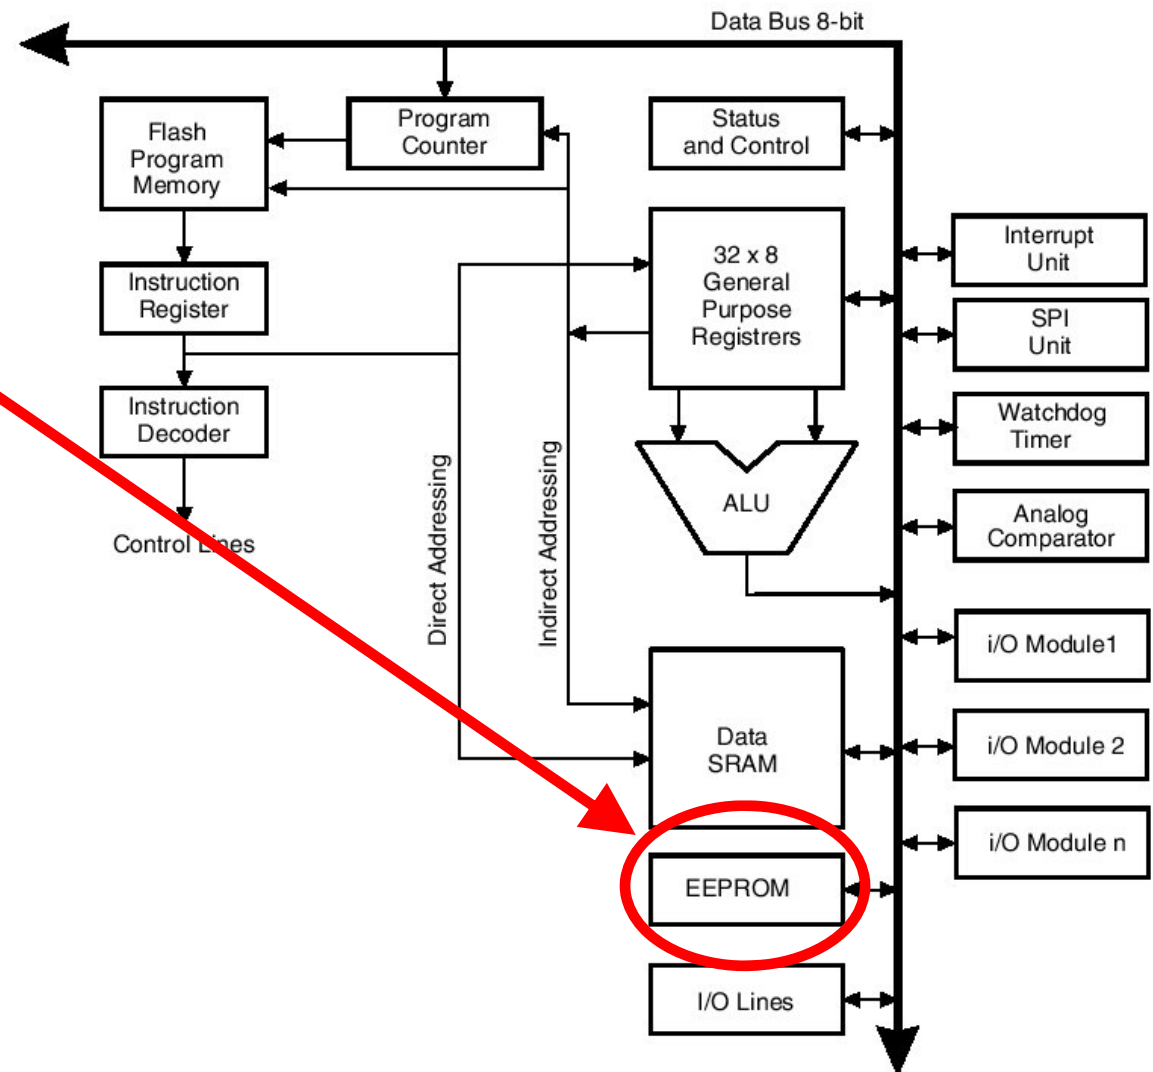


# Atmel Mega2560

Arithmetic

Logical Unit

- Data inputs from registers
- Control inputs not shown (derived from instruction decoder)

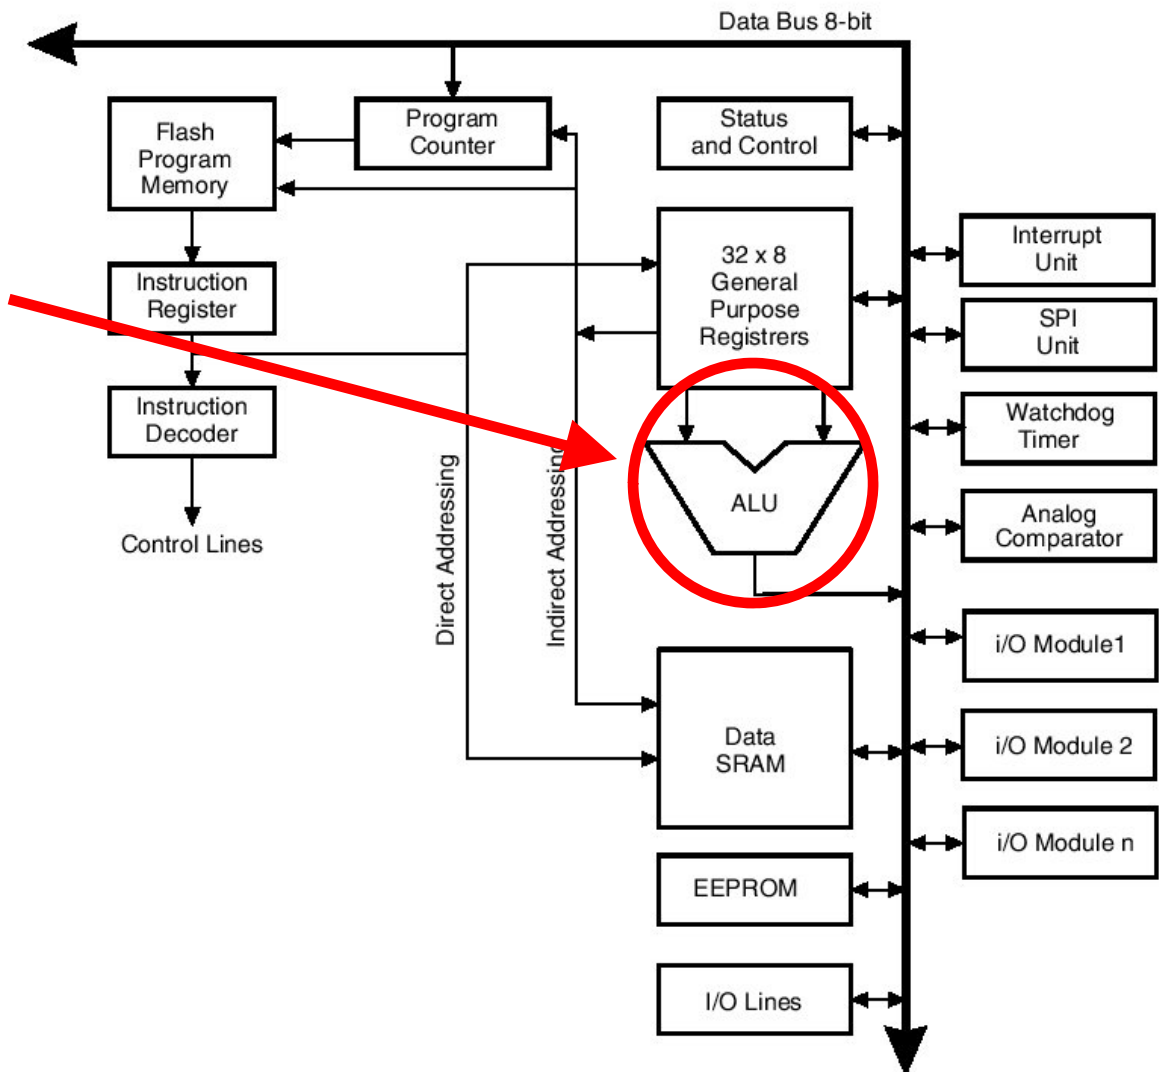

# One More Bus Note

Many devices on the bus. However, at a given time:

- There is exactly one device that is the “writer”
- There is exactly one that is the “reader”

# Machine-Level Programs

Machine-level programs are stored as sequences of ***atomic*** machine instructions

- Stored in program memory
- Execution is generally sequential (instructions are executed in order)
- But – with occasional “jumps” to other locations in memory


# Types of Instructions

- Memory operations: transfer data values between memory and the internal registers
- Mathematical operations: ADD, SUBTRACT, MULT, AND, etc.
- Tests:  $\text{value} == 0$ ,  $\text{value} > 0$ , etc.
- Program flow: jump to a new location, jump conditionally (e.g., if the last test was true)

# Mega2560: Decoding Instructions

## Program counter

- Address of currently executing instruction

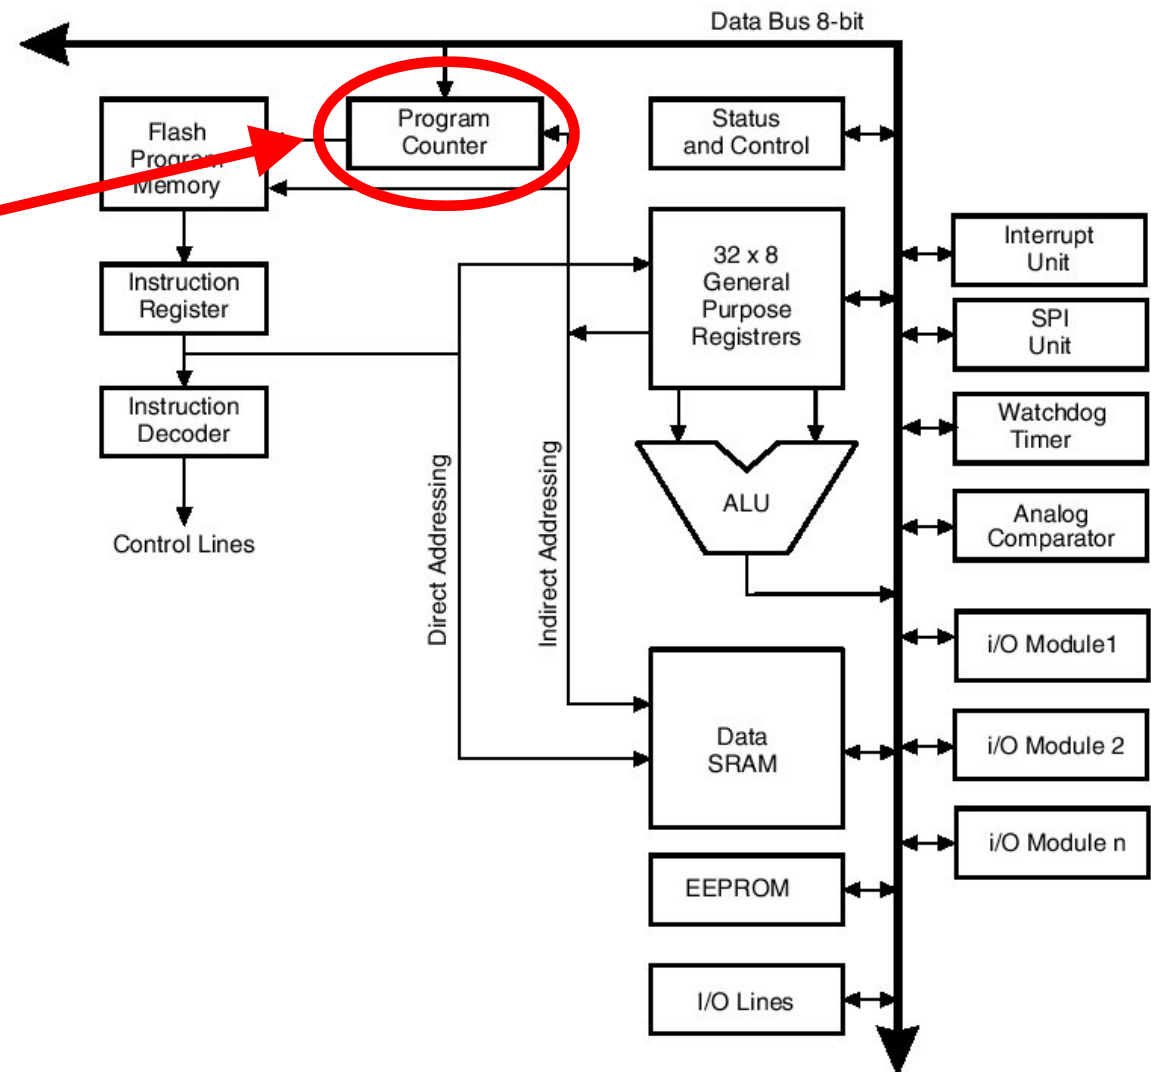




# Mega2560: Decoding Instructions

Instruction register


- Stores the machine-level instruction currently being executed

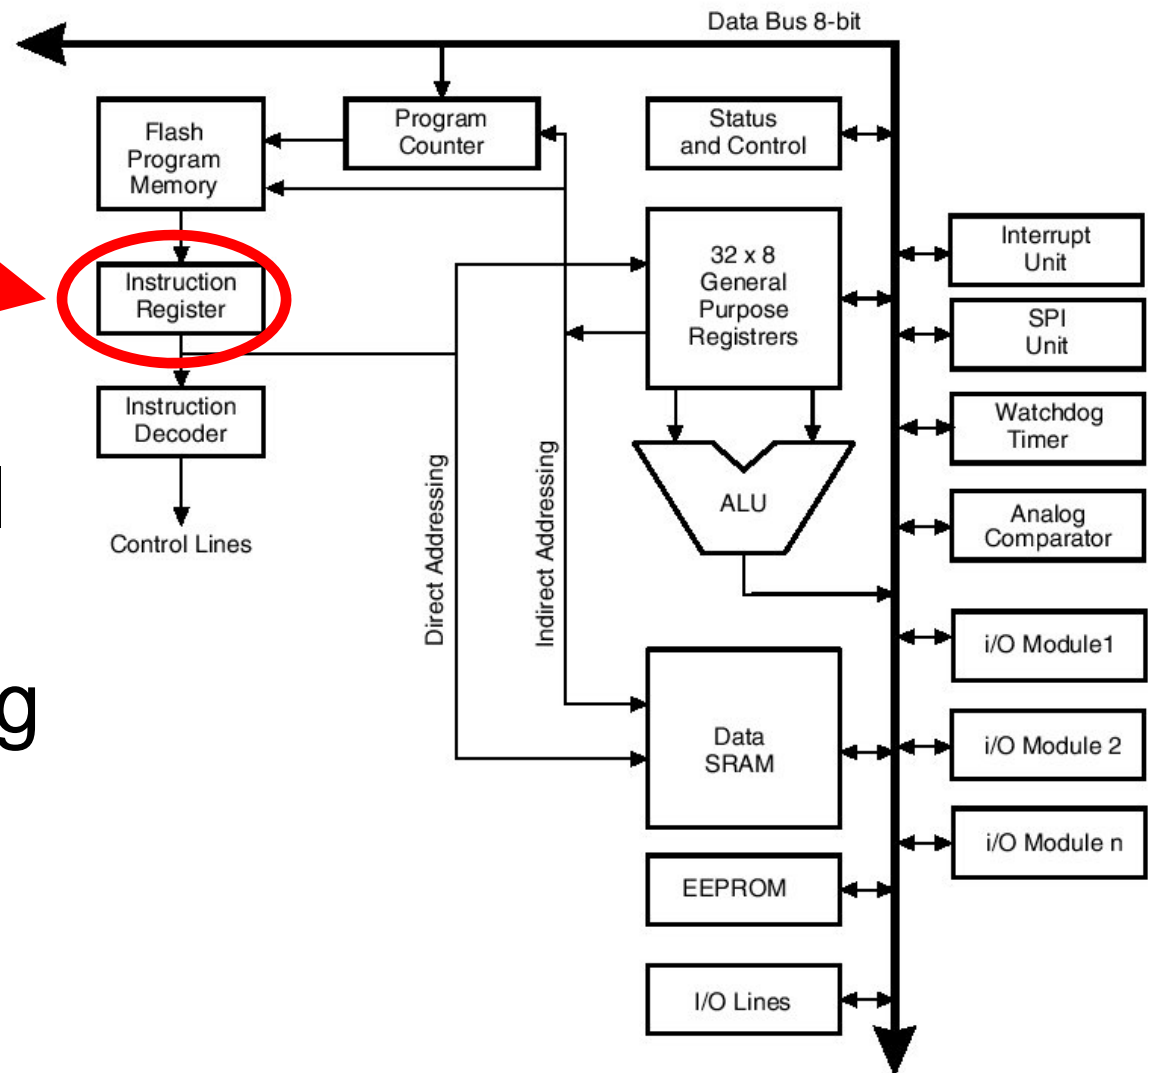

# Atmel Mega2560

Instruction decoder

- Translates current instruction into control signals for the rest of the processor

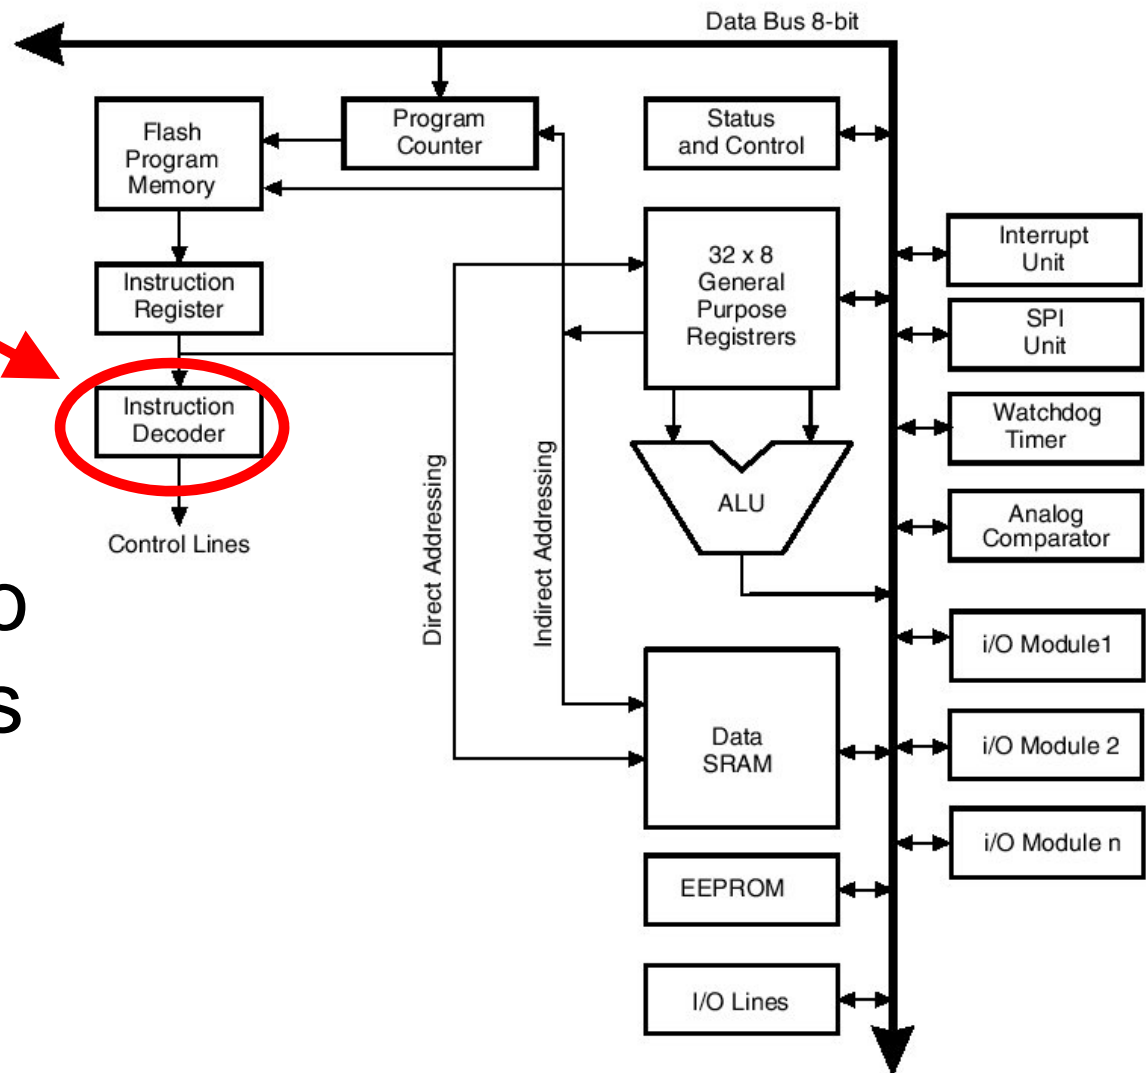

# Atmel Instructions

# Some Mega2560 Memory Operations

## **LDS Rd, k**

We refer to this as  
“Assembly Language”




- Load SRAM memory location k into register Rd
- $Rd \leftarrow (k)$

## **STS Rd, k**

- Store value of Rd into SRAM location k
- $(k) \leftarrow Rd$


# Load SRAM Value to Register

LDS Rd, k

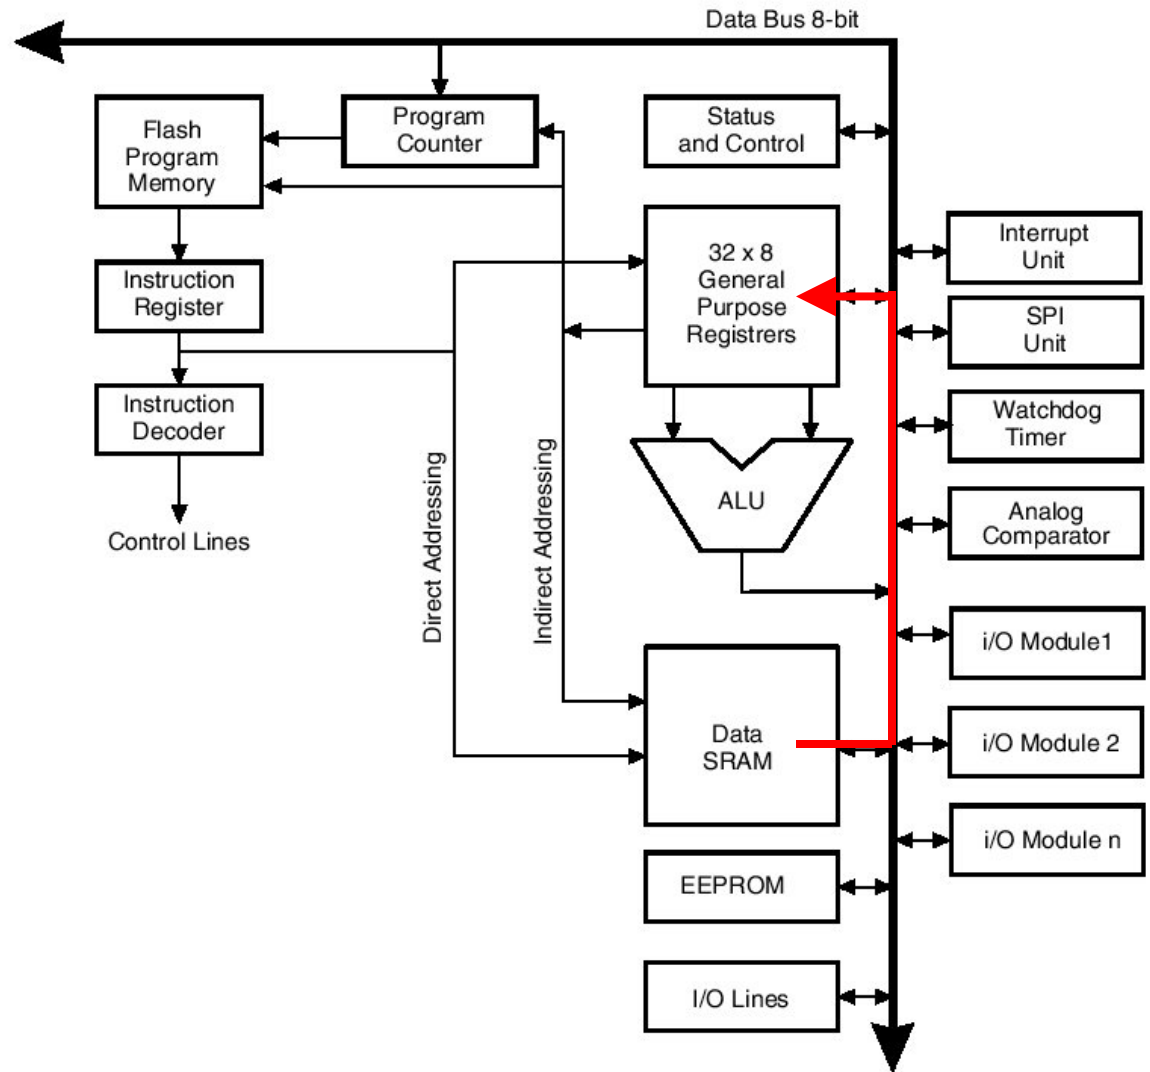

# Store Register Value to SRAM

STS Rd, k

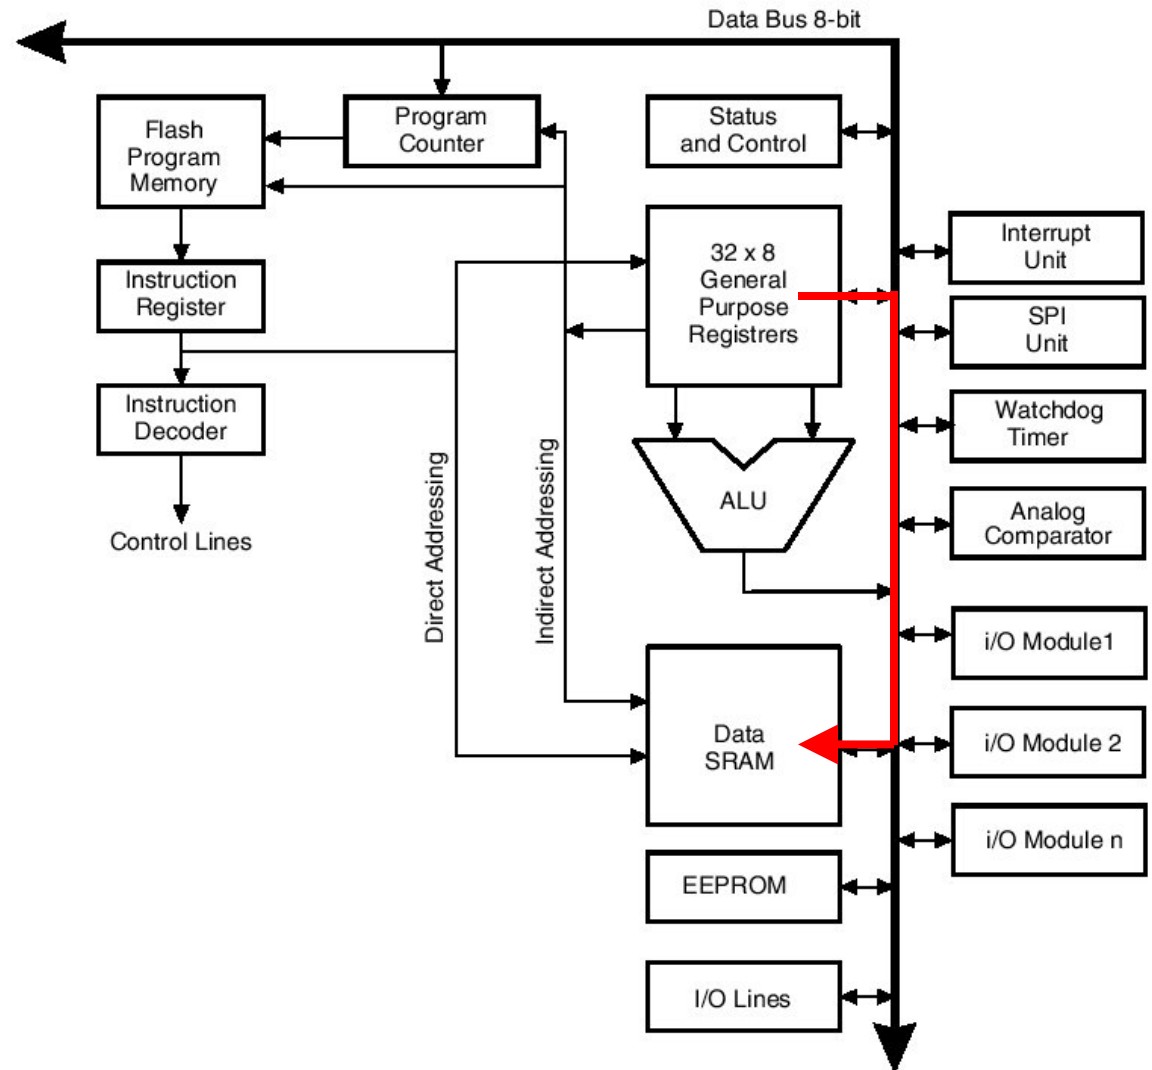

# Some Mega2560 Arithmetic and Logical Instructions

## **ADD Rd, Rr**

- Rd and Rr are registers
- Operation:  $Rd \leftarrow Rd + Rr$


## **ADC Rd, Rr**

- Add with carry
- $Rd \leftarrow Rd + Rr + C$

# Add Two Register Values

## ADD Rd, Rr

- Fetch register values

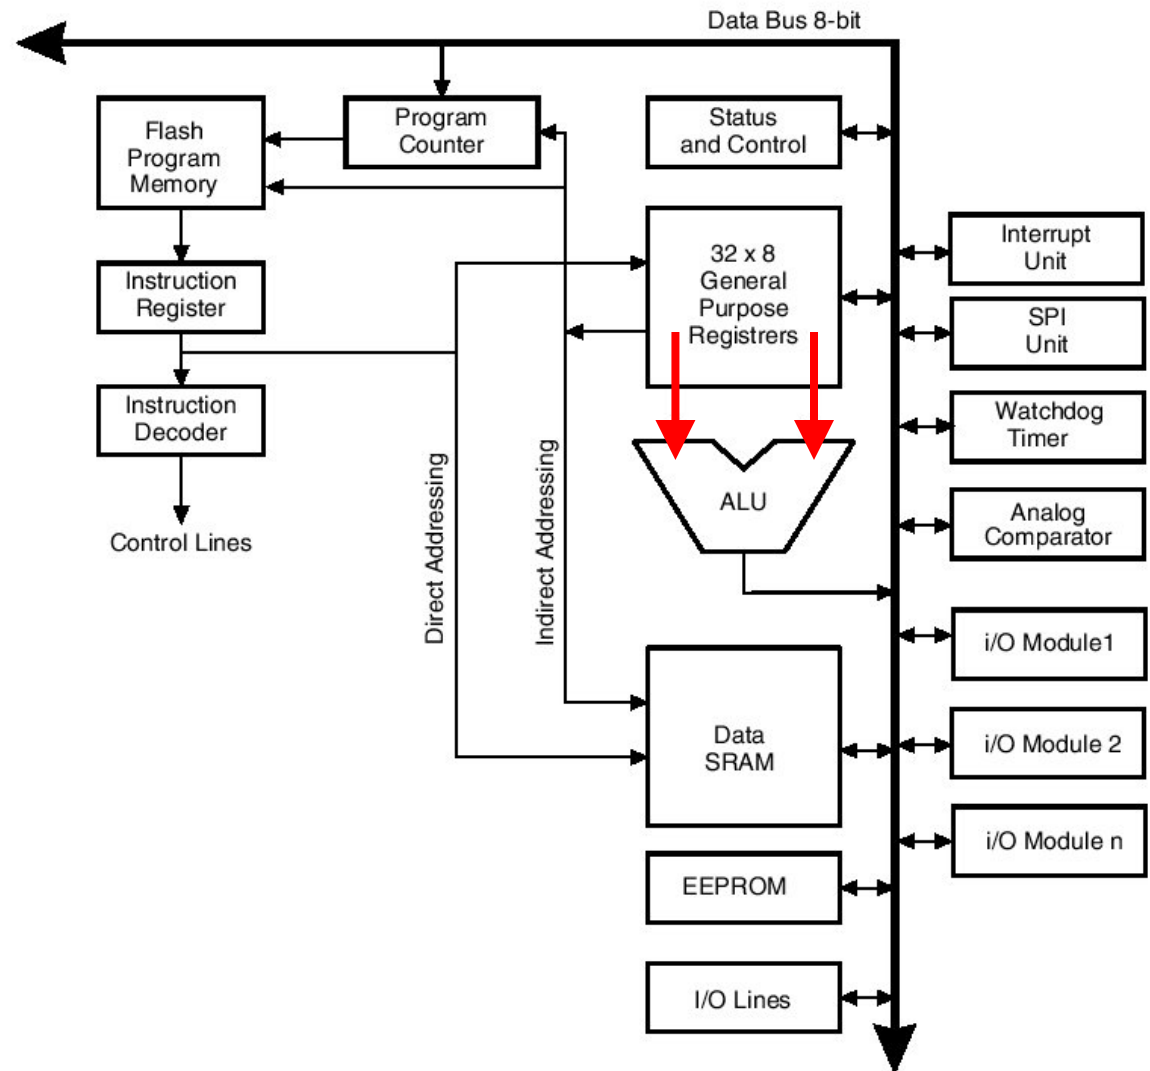




# Add Two Register Values

## ADD Rd, Rr


- Fetch register values
- ALU performs ADD

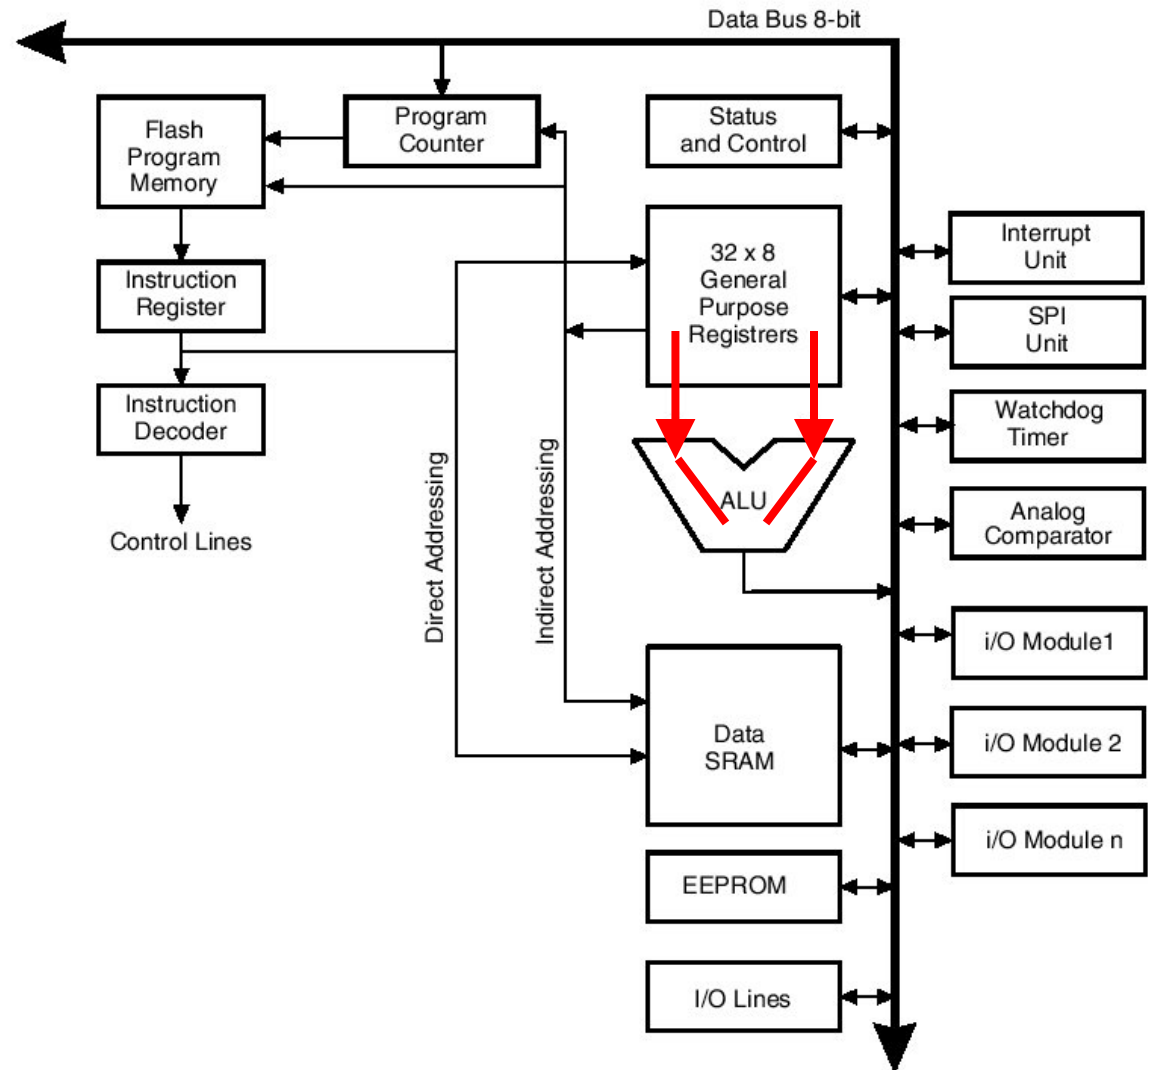

# Add Two Register Values

## ADD Rd, Rr

- Fetch register values
- ALU performs ADD
- Result is written back to register via the data bus

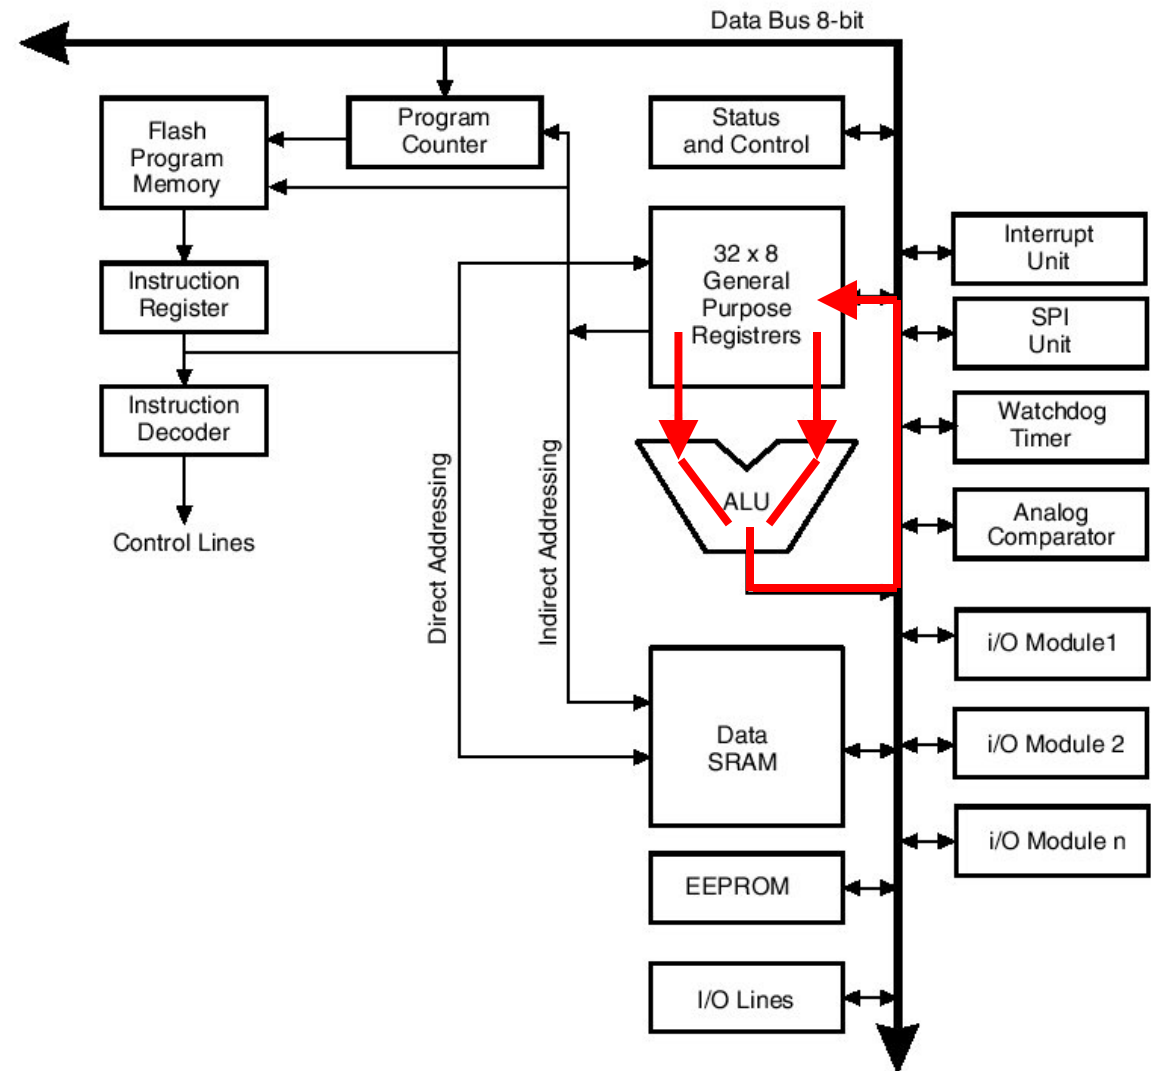

# Some Mega2560 Arithmetic and Logical Instructions

**NEG Rd:** take the two's complement of Rd

**AND Rd, Rr:** bit-wise AND with a register

**ANDI Rd, K:** bit-wise AND with a constant

**EOR Rd, Rr:** bit-wise XOR

**INC Rd:** increment Rd

**MUL Rd, Rr:** multiply Rd and Rr (unsigned)

**MULS Rd, Rr:** multiply (signed)

# Some Mega8 Test Instructions

## CP Rd, Rr


- Compare Rd with Rr

## TST Rd

- Test for if register Rd is zero or a negative number

# Some Mega8 Test Instructions

Modify the status register

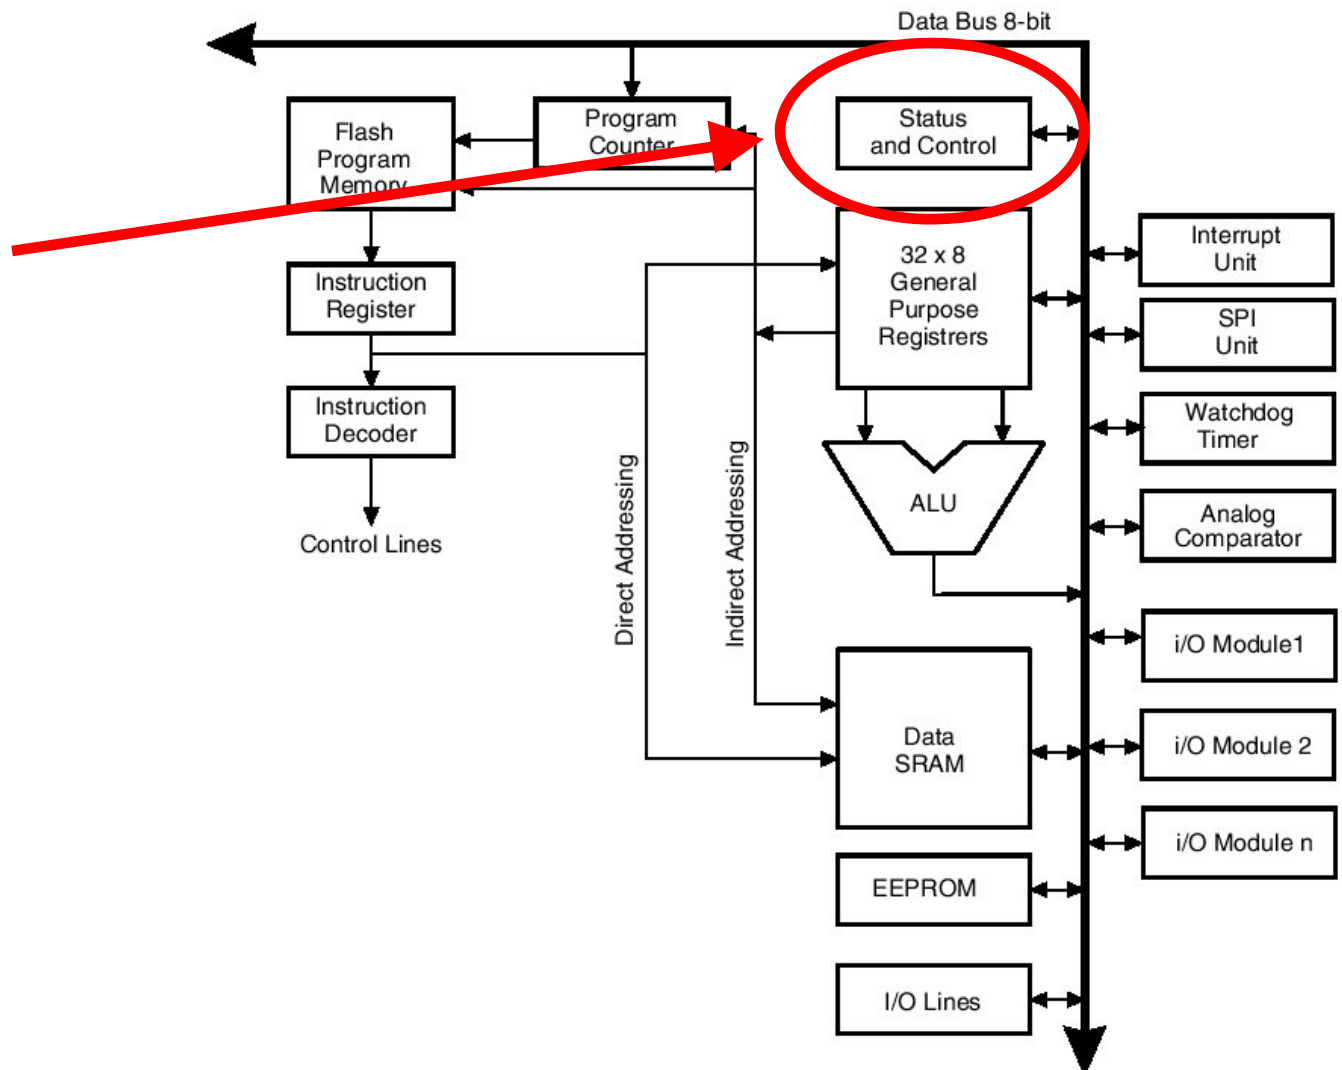

# Some Program Flow Instructions

## **RJMP k**

- Change the program counter by  $k+1$
- $PC \leftarrow PC + k + 1$

## **BRGE k**

- Branch if greater than or equal to
- If last compare was greater than or equal to, then  $PC \leftarrow PC + k + 1$

# Connecting Assembly Language to C

- Our C compiler is responsible for translating our code into Assembly Language
- Today, we rarely program in Assembly Language
  - Embedded systems are a common exception
  - Also: it is useful in some cases to view the assembly code generated by the compiler

# An Example

A C code snippet:

```
if(B < A) {  
    D += A;  
}
```



# An Example

A C code snippet:

```
if(B < A) {  
    D += A;  
}
```

The Assembly :

```
LDS R1 (A)  
LDS R2 (B)  
CP R2, R1  
BRGE 3  
LDS R3 (D)  
ADD R3, R1  
STS (D), R3
```

.....

# An Example

A C code snippet:

```
if(B < A) {  
    D += A;  
}
```

Load the contents of memory location A into register 1

The Assembly :

LDS R1 (A) ← PC

LDS R2 (B)

CP R2, R1

BRGE 3

LDS R3 (D)

ADD R3, R1

STS (D), R3

.....

# An Example

A C code snippet:

```
if(B < A) {  
    D += A;  
}
```

Load the contents of memory location B into register 2

The Assembly :

```
LDS R1 (A)
```

```
LDS R2 (B) ← PC
```

```
CP R2, R1
```

```
BRGE 3
```

```
LDS R3 (D)
```

```
ADD R3, R1
```

```
STS (D), R3
```

.....

# An Example

A C code snippet:

```
if(B < A) {  
    D += A;  
}
```

Compare the contents of register 2 with those of register 1

This results in a change to the status register

The Assembly :

```
LDS R1 (A)
```

```
LDS R2 (B)
```

```
CP R2, R1
```

← PC

```
BRGE 3
```

```
LDS R3 (D)
```

```
ADD R3, R1
```

```
STS (D), R3
```

.....

# An Example

A C code snippet:

```
if(B < A) {  
    D += A;  
}
```

Branch If Greater Than or Equal To:  
jump ahead 3 instructions if true

The Assembly :

LDS R1 (A)

LDS R2 (B)

CP R2, R1

BRGE 3


LDS R3 (D)

ADD R3, R1

STS (D), R3

.....

← PC



# An Example

A C code snippet:

```
if(B < A) {  
    D += A;  
}
```

Branch if greater than or equal to  
will jump ahead 3 instructions if  
true

The Assembly :

```
LDS R1 (A)
```

```
LDS R2 (B)
```

```
CP R2, R1
```

```
BRGE 3
```

```
LDS R3 (D)
```

```
ADD R3, R1
```

```
STS (D), R3
```

```
.....
```

if true

PC

# An Example

A C code snippet:

```
if(B < A) {  
    D += A;  
}
```

Not true: execute the next instruction

The Assembly :

```
LDS R1 (A)
```

```
LDS R2 (B)
```

```
CP R2, R1
```

```
BRGE 3
```

if not true



```
LDS R3 (D)
```

← PC

```
ADD R3, R1
```

```
STS (D), R3
```

.....

# An Example

A C code snippet:

```
if(B < A) {  
    D += A;  
}
```

Load the contents of memory  
location D into register 3

The Assembly :

```
LDS R1 (A)
```

```
LDS R2 (B)
```

```
CP R2, R1
```

```
BRGE 3
```

```
LDS R3 (D) ← PC
```

```
ADD R3, R1
```

```
STS (D), R3
```

.....



# An Example

A C code snippet:

```
if(B < A) {  
    D += A;  
}
```

Add the values in registers 1 and 3 and store the result in register 3

The Assembly :

```
LDS R1 (A)
```

```
LDS R2 (B)
```

```
CP R2, R1
```

```
BRGE 3
```

```
LDS R3 (D)
```

```
← ADD R3, R1 ← PC
```

```
STS (D), R3
```

.....

# An Example

A C code snippet:

```
if(B < A) {  
    D += A;  
}
```

Store the value in register  
3 back to memory  
location D

The Assembly :

```
LDS R1 (A)
```

```
LDS R2 (B)
```

```
CP R2, R1
```

```
BRGE 3
```

```
LDS R3 (D)
```

```
ADD R3, R1
```

```
STS (D), R3 ← PC
```

.....

- Eagle CAD training: one person per group by today

# The Important Stuff

Instructions are the “atomic” actions that are taken by the processor

- Many different component work together to execute a single instruction
- One line of C code typically translates into a sequence of several instructions
- In the mega 2560, most instructions are executed in a single clock cycle

The high-level view is important here: you won't be compiling programs on exams

# Atmel Mega2560 Microcontroller

# Atmel Mega2560

U110			
90	PF7(ADC7/TDI)	PA7(AD7)	71
91	PF6(ADC6/TDO)	PA6(AD6)	72
92	PF5(ADC5/TMS)	PA5(AD5)	73
93	PF4(ADC4/TCK)	PA4(AD4)	74
94	PF3(ADC3)	PA3(AD3)	75
95	PF2(ADC2)	PA2(AD2)	76
96	PF1(ADC1)	PA1(AD1)	77
97	PF0(ADC0)	PA0(AD0)	78
1	PG5(OC0B)	PB7(OC0A/OC1C)	26
29	PG4(TOSC1)	PB6(OC1B)	25
28	PG3(TOSC2)	PB5(OC1A)	24
70	PG2(ALE)	PB4(OC2A)	23
52	PG1(RD)	PB3(MISO)	22
51	PG0(WR)	PB2(MOSI)	21
		PB1(SCK)	20
		PB0(SS)	19
27	PH7(T4)		
18	PH6(OC2B)		
17	PH5(OC4C)	PC7(A15)	60
16	PH4(OC4B)	PC6(A14)	59
15	PH3(OC4A)	PC5(A13)	58
14	PH2(XCK2)	PC4(A12)	57
13	PH1(TXD2)	PC3(A11)	56
12	PH0(RXD2)	PC2(A10)	55
		PC1(A9)	54
		PC0(A8)	53
79	PJ7		
69	PJ6(PCINT15)		
68	PJ5(PCINT14)	PD7(T0)	50
67	PJ4(PCINT13)	PD6(T1)	49
66	PJ3(PCINT12)	PD5(XCK1)	48
65	PJ2(XCK3)	PD4(ICP1)	47
64	PJ1(TXD3)	PD3(TXD1/INT3)	46
63	PJ0(RXD3)	PD2(RXD1/INT2)	45
		PD1(SDA/INT1)	44
		PD0(SCL/INT0)	43
82	PK7(ADC15)		
83	PK6(ADC14)		
84	PK5(ADC13)	PE7(ICP3/INT7)	9
85	PK4(ADC12)	PE6(T3/INT6)	8
86	PK3(ADC11)	PE5(OC3C/INT5)	7
87	PK2(ADC10)	PE4(OC3B/INT4)	6
88	PK1(ADC9)	PE3(OC3A/AIN1)	5
89	PK0(ADC8)	PE2(XCK0/AIN0)	4
		PE1(TXD0)	3
		PE0(RXD0)	2
42	PL7		
41	PL6		
40	PL5(OC5C)		
39	PL4(OC5B)		
38	PL3(OC5A)		
37	PL2(T5)		
36	PL1(ICP5)		
35	PL0(ICP4)		

Andrew H. Fagg  
Time Systems:

# Atmel Mega2560

Pins are organized  
into 8-bit “Ports”:

- A, B, C ... L
  - But no “I”

U110			
90	PF7(ADC7/TDI)	PA7(AD7)	71
91	PF6(ADC6/TDO)	PA6(AD6)	72
92	PF5(ADC5/TMS)	PA5(AD5)	73
93	PF4(ADC4/TCK)	PA4(AD4)	74
94	PF3(ADC3)	PA3(AD3)	75
95	PF2(ADC2)	PA2(AD2)	76
96	PF1(ADC1)	PA1(AD1)	77
97	PF0(ADC0)	PA0(AD0)	78
1	PG5(OC0B)	PB7(OC0A/OC1C)	26
29	PG4(TOSC1)	PB6(OC1B)	25
28	PG3(TOSC2)	PB5(OC1A)	24
70	PG2(ALE)	PB4(OC2A)	23
52	PG1(RD)	PB3(MISO)	22
51	PG0(WR)	PB2(MOSI)	21
		PB1(SCK)	20
27	PH7(T4)	PB0(SS)	19
18	PH6(OC2B)		
17	PH5(OC4C)	PC7(A15)	60
16	PH4(OC4B)	PC6(A14)	59
15	PH3(OC4A)	PC5(A13)	58
14	PH2(XCK2)	PC4(A12)	57
13	PH1(TXD2)	PC3(A11)	56
12	PH0(RXD2)	PC2(A10)	55
		PC1(A9)	54
79	PJ7	PC0(A8)	53
69	PJ6(PCINT15)		
68	PJ5(PCINT14)	PD7(T0)	50
67	PJ4(PCINT13)	PD6(T1)	49
66	PJ3(PCINT12)	PD5(XCK1)	48
65	PJ2(XCK3)	PD4(ICP1)	47
64	PJ1(TXD3)	PD3(TXD1/INT3)	46
63	PJ0(RXD3)	PD2(RXD1/INT2)	45
		PD1(SDA/INT1)	44
82	PK7(ADC15)	PD0(SCL/INT0)	43
83	PK6(ADC14)		
84	PK5(ADC13)	PE7(ICP3/INT7)	9
85	PK4(ADC12)	PE6(T3/INT6)	8
86	PK3(ADC11)	PE5(OC3C/INT5)	7
87	PK2(ADC10)	PE4(OC3B/INT4)	6
88	PK1(ADC9)	PE3(OC3A/AIN1)	5
89	PK0(ADC8)	PE2(XCK0/AIN0)	4
		PE1(TXD0)	3
42	PL7	PE0(RXD0)	2
41	PL6		
40	PL5(OC5C)		
39	PL4(OC5B)		
38	PL3(OC5A)		
37	PL2(T5)		
36	PL1(ICP5)		
35	PL0(ICP4)		

# Digital Input/Output

- Each port has three special-purpose registers that control its behavior.
- For port B, they are:
  - DDRB: data direction register B
  - PORTB: port output register B
  - PINB: port input B



# Data Direction Register: DDRx

- 8-bit wide register
  - Controls one pin with each bit
- 0 -> this is an input pin
- 1 -> this is an output pin

# Port Output Register: PORTx

- Also one pin per bit
- If configured as an output:
  - 0 -> the pin is held at 0 V
  - 1 -> the pin is held at +5 V
- Note: only configure pins as an output if you really mean it!


# Port INput register: PINx

- One pin per bit
- Reading from the register:
  - 0 -> the voltage of the pin is near 0 V
  - 1 -> the voltage of the pin is near +5 V
- If nothing is connected to the pin, then the pin will appear to be in a random state

# A First Program

Flash the LEDs at a regular interval


- How do we do this?

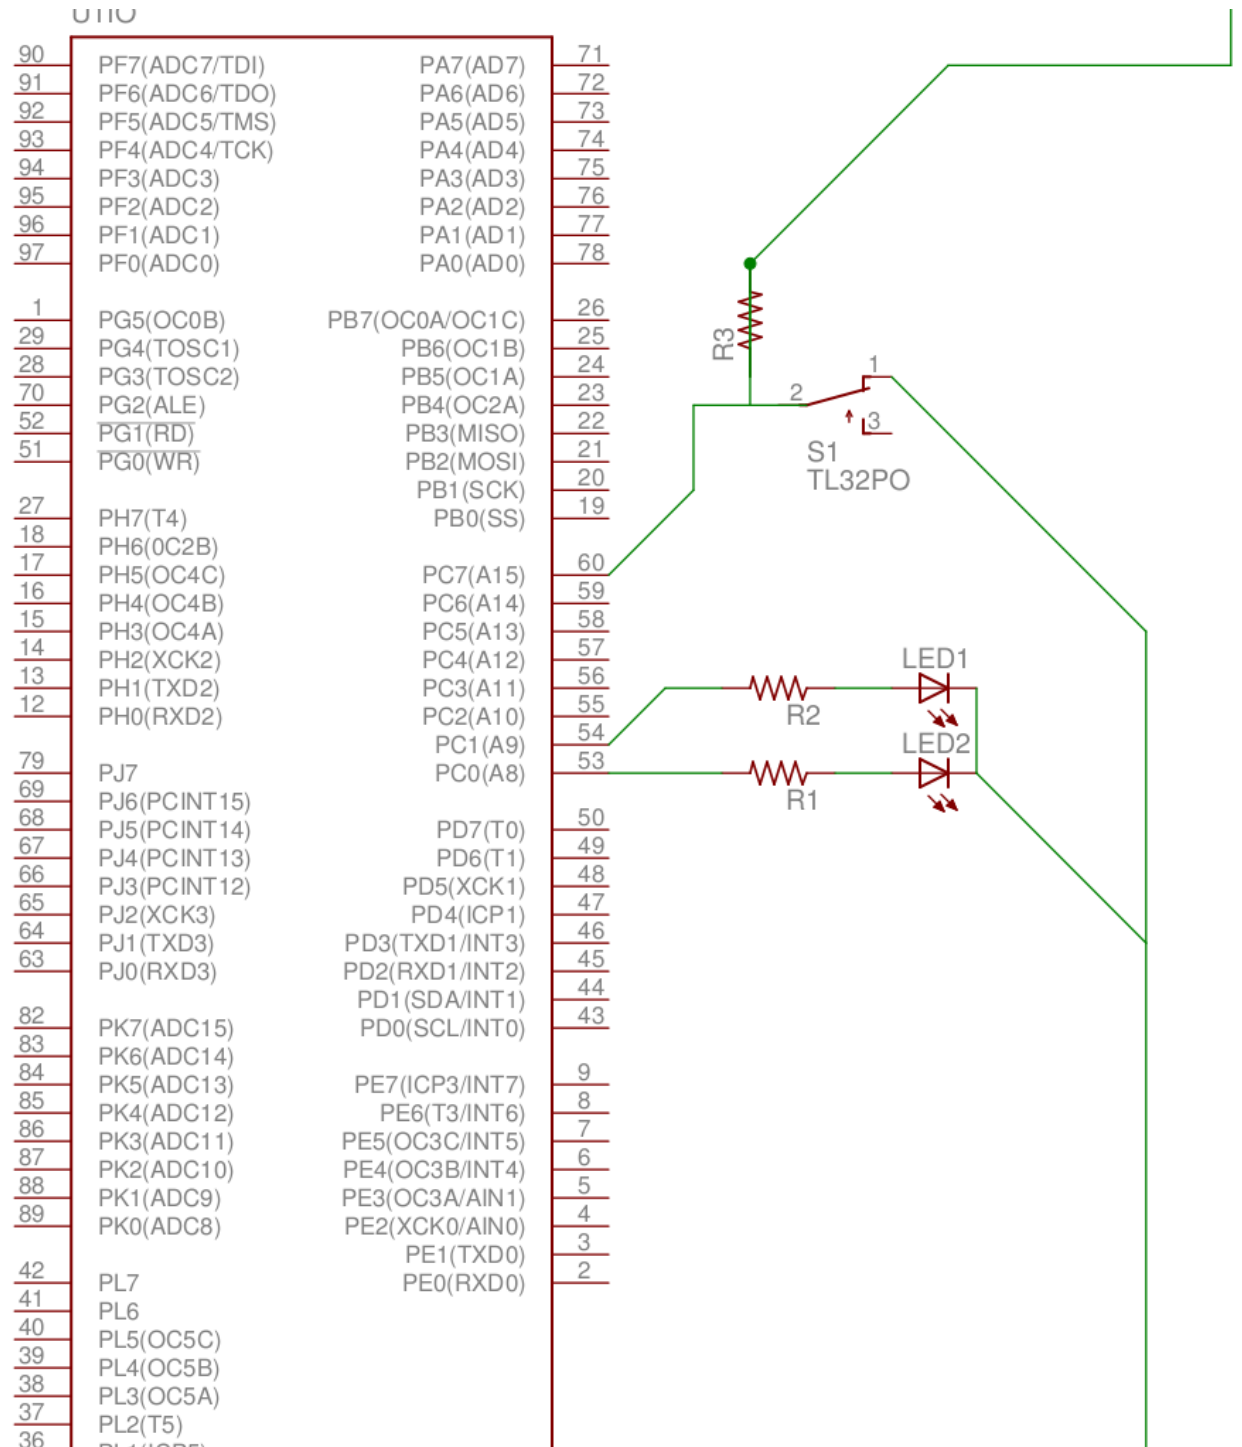

# A First Program

How do we flash the LED at a regular interval?

- We toggle the state of PC0

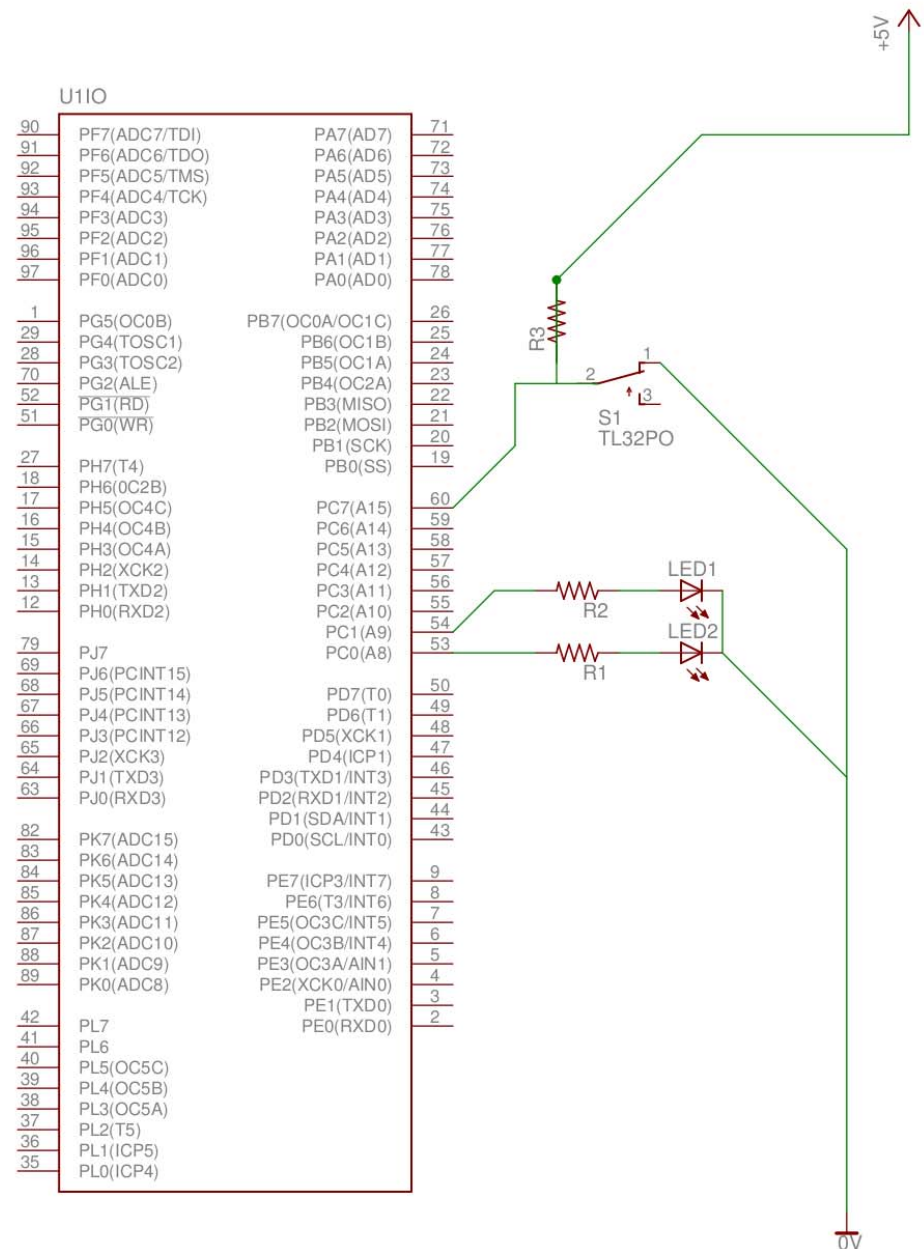

# A First Program

```
main() {  
    DDRC = 0x3;  
  
    while(1) {  
        PORTC = PORTC | 0x1; // sets PC0 to 1  
        delay_ms(100);  
        PORTC = PORTC & ~0x1; // set PC0 to 0  
        delay_ms(100);  
    }  
}
```

# A First Program

```
main() {  
    DDRC = 0x3;  
  
    while(1) {  
        PORTC = PORTC ^ 0x1; // flip PC0 to 1  
        delay_ms(100);  
    }  
}
```

# A First Program

```
main() {  
    DDRC = 1;    // Set port C pin 0 as an output  
  
    while(1) {  
        PORTC = PORTC ^ 0x1;    // XOR bit 0 with 1  
        delay_ms(500);          // Pause for 500 msec  
    }  
}
```



# A Second Program

```
main() {
    DDRC = 3;    // Set port C pins 0, and 1 as outputs

    while(1) {
        PORTC = PORTC ^ 0x1;    // XOR bit 0 with 1
        delay_ms(500);          // Pause for 500 msec
        PORTC = PORTC ^ 0x2;    // XOR bit 1 with 1
        delay_ms(250);
        PORTC = PORTC ^ 0x2;    // XOR bit 1 with 1
        delay_ms(250);
    }
}
```

## What does this program do?

# A Second Program

```
main() {
    DDRC = 3;    // Set port C pins 0, and 1 as outputs

    while(1) {
        PORTC = PORTC ^ 0x1;    // XOR bit 0 with 1
        delay_ms(500);          // Pause for 500 msec
        PORTC = PORTC ^ 0x2;    // XOR bit 1 with 1
        delay_ms(250);
        PORTC = PORTC ^ 0x2;    // XOR bit 1 with 1
        delay_ms(250);
    }
}
```

**Flashes LED on PC1 at 1 Hz  
on PC0: 0.5 Hz**

# Port-Related Registers

Some of the C-accessible registers for controlling digital I/O:

	Directional control	Writing	Reading
Port B	DDRB	PORTB	PINB
Port C	DDRC	PORTC	PINC
Port D	DDRD	PORTD	PIND

# More Bit Masking

- Suppose we have a 3-bit number (so values 0 ... 7)
- Suppose we want to set the state of B3, B4, and B5 with this number (B3 is the least significant bit)

And: we want to leave the other bits undisturbed

- How do we express this in code?

# Bit Masking

```
main() {
    DDRB = 0x38;    // Set pins B3, B4, B5 as outputs

    :
    :

    uint8_t val;

    val = command_to_robot;    // A value between 0 and 7

    PORTB = ????    // Fill this in
}
```

# Bit Masking

```
main() {
    DDRB = 0x38;    // Set pins B3, B4, B5 as outputs

    :
    :

    uint8_t val;

    val = command_to_robot;    // A value between 0 and 7

    PORTB = (PORTB & ~0x38)    // Set the current B3-B5 to 0s
        | ((val & 0x7) << 3);    // OR with new values (shifted
        // to fit within B3-B5
}
```

# Reading the Digital State of Pins

Given: we want to read the state of PB6 and PB7 and obtain a value of 0 ... 3

- How do we configure the port?
- How do we read the pins?
- How do we translate their values into an integer of 0 .. 3?

# Reading the Digital State of Pins

```
main() {
    DDRB = 0x38;    // Set pins B3, B4, B5 as outputs
                   // All others are inputs (suppose we care
                   // about bits B6 and B7 only (so a 2-bit
                   // number)
    :
    :

    unsigned short val, outval; // A short is 8-bits wide

    val = ???? // Read the input value of B

    outval = ??? // Translate to a value of 0 ... 3
}
```



# Reading the Digital State of Pins

```
main() {
    DDRB = 0x38;    // Set pins B3, B4, B5 as outputs
                  // All others are inputs (suppose we care
                  // about bits B6 and B7 only (so a 2-bit
                  // number)
    :
    :

    unsigned short val, outval; // A short is 8-bits wide

    val = PINB;

    outval = (val & 0xC0) >> 6;
}
```

# Putting It All Together

- Program development:
  - On your own laptop
  - We will use a C “crosscompiler” (avr-gcc and other tools) to generate code on your laptop for the mega8 processor
- Program download:
  - We will use “in circuit programming”: you will be able to program the chip without removing it from your circuit

# Compiling and Downloading Code

Preparing to program:

- See the Atmel HOWTO (pointer from the schedule page)
- Windoze: Install AVR Studio and WinAVR
- OS X: Install OSX-AVR
  - We will use ‘make’ for compiling and downloading
- Linux: Install binutils, avr-gcc, avr-libc, and avrdude
  - Same as OS X